

POLAR

25x75*

- 

Wall Tiles
Revestimiento
- 

White Body
Pasta Blanca
- 

Double firing
Bicocción

*Commercial format
Formato comercial




Wall: Polar nacar_Nacar Model_ 25,1x75,6 cm




Wall: Polar nacar_Nacar Model_nacar Truck 25,1x75,6 cm Finir Copper Lista floor: Neila Maple Nat. 24,9 x100 cm

POLAR

25,2 X 75,9 cm - 9.88” x 29.76”



Polar White
25,2 x 75,9 cm



Polar Nacar
25,2 x 75,9 cm



Polar White Model
25,2 x 75,9 cm




Polar Nacar Model
25,2 x 75,9 cm



Polar White Tuck
25,2 x 75,9 cm



Polar Nacar Tuck
25,2 x 75,9 cm

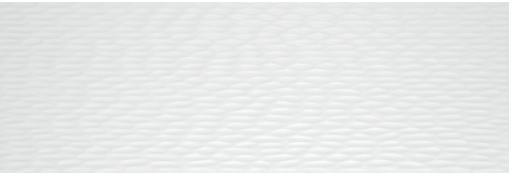


Polar White Leaf
25,2 x 75,9 cm



Polar Nacar Leaf
25,2 x 75,9 cm




Matching floor tiles | Pavimento coordinado




Rainbow blanco Nat
59,2x59,2 cm



Primary White Nat*
29,5x29,5 cm



Primary Ivory Nat*
29,5x29,5 cm





Sincro Blanco
29,5x29,5 cm




Sincro negro
29,5x29,5 cm




Sincro Beige
29,5x29,5 cm

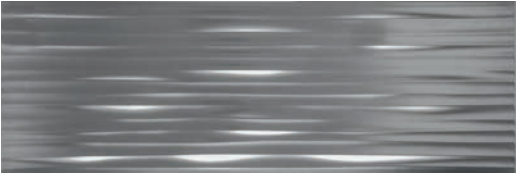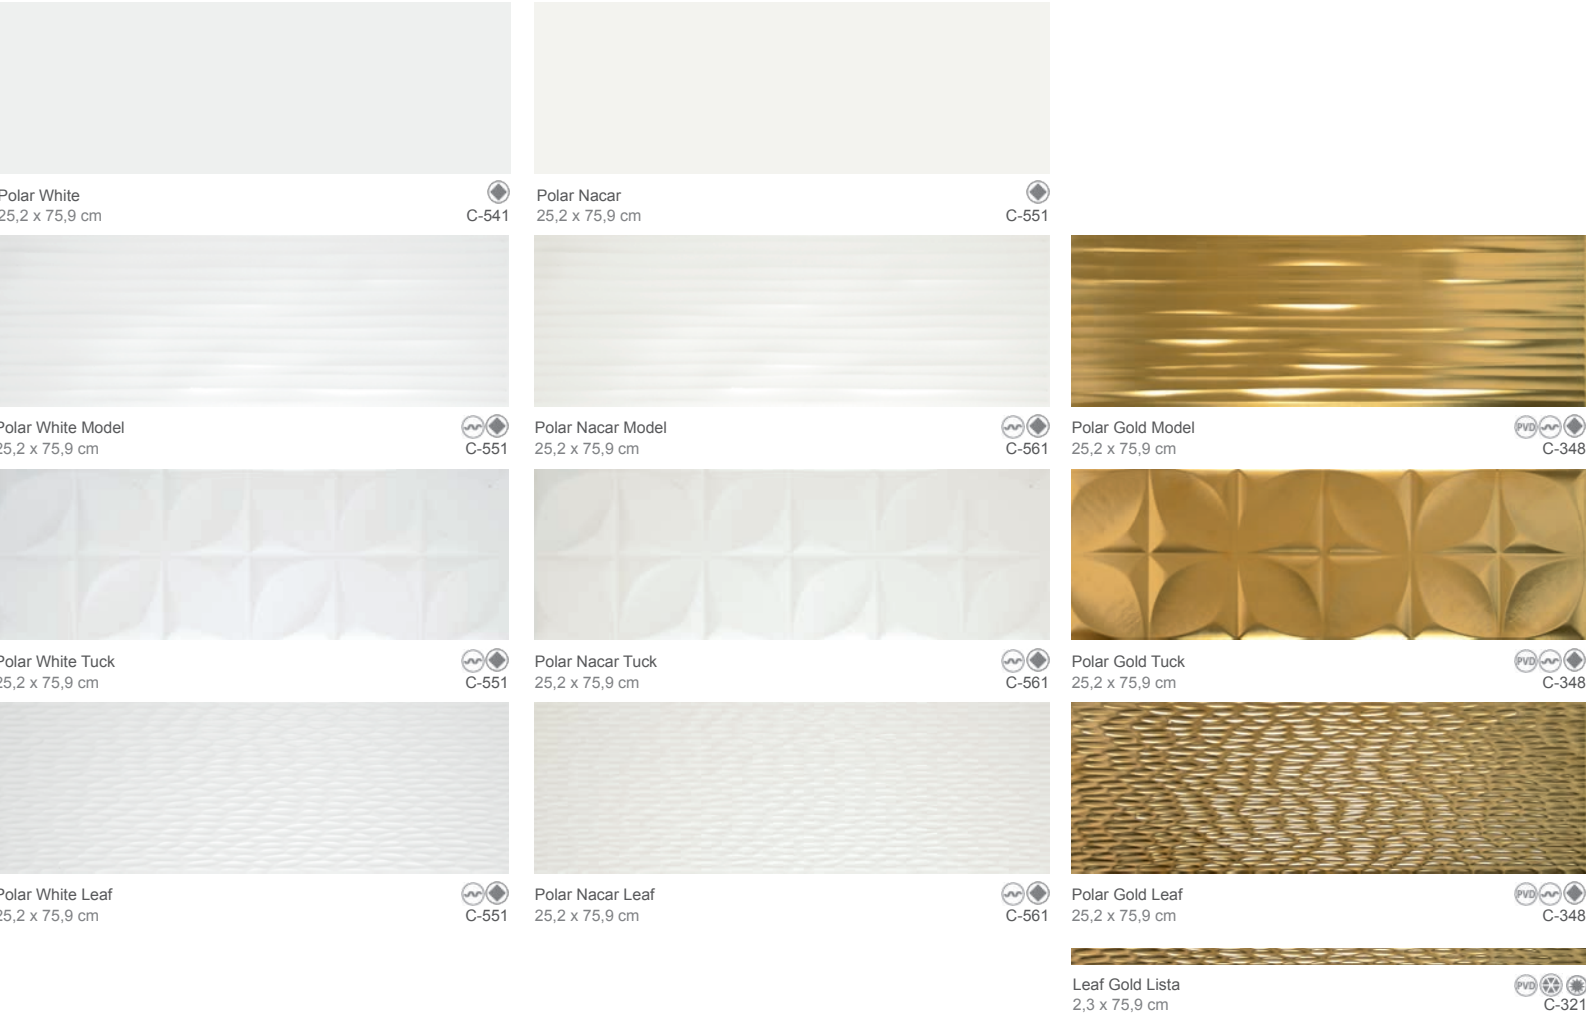

Polar Silver Model
25,2 x 75,9 cm

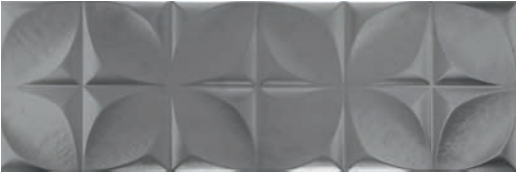


Polar Silver Tuck
25,2 x 75,9 cm

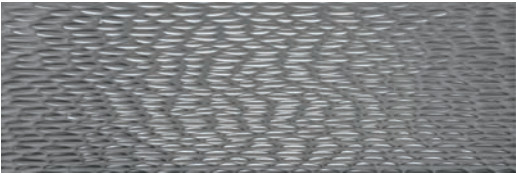


Polar Silver Leaf
25,2 x 75,9 cm




Leaf Silver Lista
2,3 x 75,9 cm

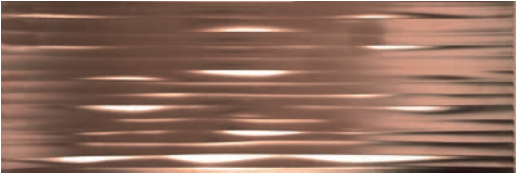


Polar Copper Model
25,2 x 75,9 cm

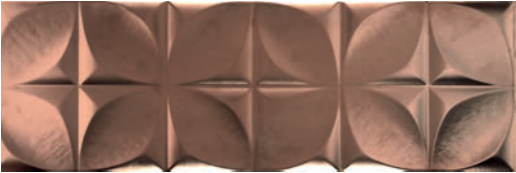

Polar Copper Tuck
25,2 x 75,9 cm

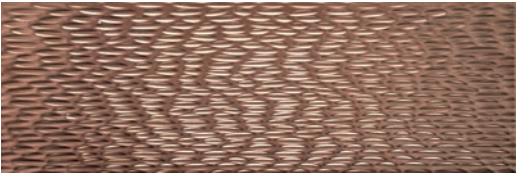

Polar Copper Leaf
25,2 x 75,9 cm



Seki White_Pearl_Black Lista
1,5 x 75,9 cm



Alloy Lista
1,5 x 75,9 cm



Finir Gold_Silver_Copper Lista
1 x 75,9 cm



Physical Vapor Deposition (PVD)
Pvd is a field in the application of nanotechnology. The process consists of depositing layers of atoms, inside a vacuum chamber, to a solid surface. The layering is produced by the condensation of a vaporized metal (such as gold, titanium, platinum etc.) over the selected surface. Advantages: High resistance to abrasion and scratches; much higher than metals applied by firing.As a general rule, any non-aggressive, pH neutral product have to be used. Do not mix pieces from different lots.

El PVD es uno de los campos de aplicación de la nanotecnología. El proceso consiste en depositar capas de átomos, en una cámara de alto vacío, sobre una superficie sólida. El recubrimiento se produce por la condensación de un metal vaporizado, oro, titanio, platino, ect. sobre el material a recubrir. Ventajas: Mayor resistencia al rayado y a la abrasión que los metales aplicados por cocción. Para la limpieza de estos materiales deben utilizarse productos no agresivos con pH neutro. No mezclar piezas de diferentes lotes.

Series	Format	Unit	Boxes/Pallet	m²/Pallet	m²/Box	Pieces/Box	Kg/Pallet	Kg/Box
Polar	25,2x75,6x0,97	m²	45	60,30	1,34	7	1128	24,76
Polar Model/Tuck/Leaf	25,2x75,6x0,97	m²	45	60,30	1,34	7	1128	24,76
Polar Gold-silver-Copper Model/Tuck/Leaf	25,2x75,6x0,97	pz	13	19,90	1,53	8	382	28,31
Leaf gold-silver lista	2,3x75,9	pz	40	9,76	0,24	14	219	5,12
Seki lista	1,5x75,9	pz	40	6,40	0,16	14	128	3,20
Alloy lista	1,5x75,6	pz	40	51	1,28	112	439	10,62
Finir lista	1x75,9	pz	40	4,24	0,11	14	107	2,32