

DECLARATION OF PERFORMANCE



011DPE-2013-06-30

1. Unique identification code of the product type
Type, batch or serial number or any other element allowing identification of the product

Dry-pressed ceramic tiles, with water absorption $3\% < E_b \leq 6\%$, TYPE RED BODY

2. Intended use (s)

For internal and external floorings

3. Name or registered trade mark, and contact address of the manufacturer

CERAMICAS APARICI, S.A.
Ctra. Castellón-Alcora, km 12
12130 San Juan de Moró (Castellón) SPAIN

4. System (s) of assessment and verification of constancy of performance

System 4

5. . Name and identification number of notified laboratory, if relevant

N/A

6. Declared performances.


Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	AI FL	EN 14411:2012
Release of dangerous substance, for:		
- Cadmium	NPD (*)	
- Lead	NPD (*)	
Breaking strength		
- Thickness $\geq 7,5$ mm	>1.100 N	
- Thickness < 7,5 mm	>600 N	
Slipperiness	NPD (*)	
Tactility	NPD (*)	
Thermal shock resistance	Pass	
Durability for:		
- internal uses	Pass	
- external uses: freeze-thaw resistance	Does not pass	

(*) Performance not declared

The performance of the product identified in point 1 is in conformity with the declared performances in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.

Signed for and on behalf of the manufacturer by:

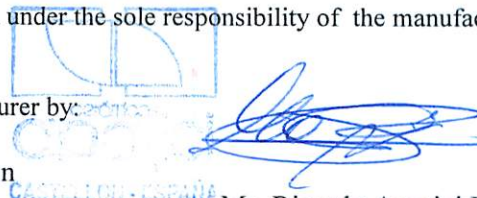

In San Juan de Moró (Castellón) Spain

June, 30 2013

Mr. Ricardo Aparici Edo